


**Kinghelm®**

Rev	ECN NO	Content of the changes	Principal	Date
Rev		重新发行图纸	ZHOU YU	2017-09-15

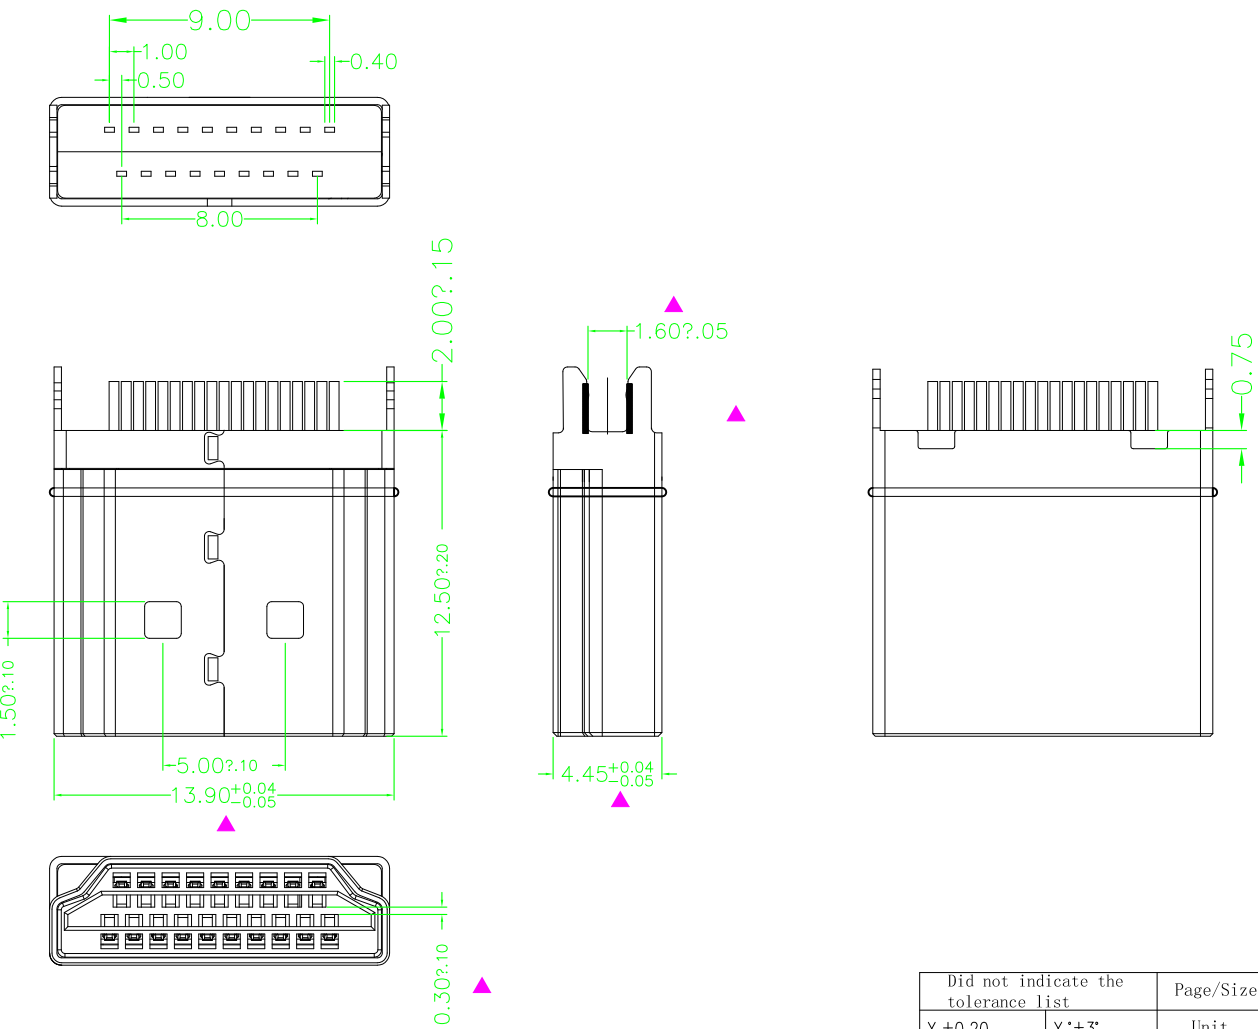

NOTE :

1. SPECIFICATION:

- 1.1. CURRENT RATING: 0.5 Amp Max.
- 1.2. VOLTAGE RATING: 40 V ac (r. m. s) Max.
- 1.3. CONTACT RESISTANCE: 10m ohms Max. mated
- 1.4. INSULATION RESISTANCE: 100M ohms Min.
- 1.5. DIELECTRIC WITHSTANDING VOLTAGE: AC 500V Min. (for 1 minute)
- 1.6. OPERATION TEMPERATURE RANGE: -25° C ~ 85° C

2. MECHANICAL

- 2.1. INSERTION FORCE: 4.5KGF MAXMUM
- 2.1. WITHDRAWAL FORCE: 1.0KGF MINIMUM; 4.0KGF MAXMUM
- 2.3. DURABILITY: 10000 CYCLES AT 100±50 CYCLES PERHOUR, CONTACT CHANCE FROM INITIAL VALUE: 30MINI Ohms MAX

▲ "为品管重点管控尺寸"

Did not indicate the tolerance list		Page/Size	1/1 A4	深圳市金航标电子有限公司	www.kinghelm.com.cn
X.±0.20	X.±3'	Unit	MM	KH-HDMI-0021-JBS	
.X±0.10	.X'±2'	Rev	A1	0755-28190160	
.XX±0.05	.XX'±1'	Drawing		Item NO	HDMI AM 夹板式1.6mm L=2.0MM 直针有筋 A款
.XXX±0.02	.XXX'±0.5'	Checked		Part NO	
Scale: 1:1		Approved		DWG NO	